


Koncovky Global Spiral

se závitů SAE s plochým čelem

Kolena 90° SAE s plochým čelem, krátké provedení, vnitřní závit s o-kroužkem, otočná

| Obj. č. | Hadice D DN | Závit SAE ploché čelo | A (mm) | B (mm) | E (mm) | H1 (mm) | H2 (mm) |
|-----------------|----------------|--------------------------|-----------|-----------|-----------|------------|------------|
| GSF-F90S-111610 | 10 mm | UN 11/16"-16 | 78,0 | 42,2 | 23,0 | 22,0 | 22,0 |
| GSF-F90S-131612 | 12 mm | UN 13/16"-16 | 86,0 | 48,5 | 29,0 | 24,0 | 27,0 |
| GSF-F90S-191612 | 12 mm | UN 1 3/16"-12 | 107,0 | 69,5 | 48,0 | 36,0 | 27,0 |
| GSF-F90S-1016 | 16 mm | UNS 1"-14 | 106,6 | 56,3 | 32,0 | 30,0 | 30,0 |
| GSF-F90S-1020 | 20 mm | UNS 1"-14 | 111,0 | 60,0 | 32,0 | 30,0 | 32,0 |
| GSF-F90S-191620 | 20 mm | UN 1 3/16"-12 | 128,0 | 77,0 | 48,0 | 36,0 | 32,0 |
| GSF-F90S-231620 | 20 mm | UN 1 7/16"-12 | 137,0 | 86,0 | 56,0 | 41,0 | 32,0 |
| GSF-F90S-231625 | 25 mm | UN 1 7/16"-12 | 144,0 | 87,6 | 56,0 | 41,0 | 41,0 |
| GSF-F90S-271625 | 25 mm | UN 1 11/16"-12 | 151,1 | 94,7 | 64,0 | 50,0 | 41,0 |
| GSF-F90S-271632 | 32 mm | UN 1 11/16"-12 | 172,0 | 100,9 | 64,0 | 50,0 | 50,0 |
| GSF-F90S-2032 | 32 mm | UN 2"-12 | 172,0 | 100,9 | 64,0 | 60,0 | 50,0 |


Poznámka: pro rozměry 10 až 32 mm je pracovní tlak 420 bar



Kolena 90° SAE s plochým čelem, střední provedení, vnitřní závit s o-kroužkem, otočná

| Obj. č. | Hadice D DN | Závit SAE ploché čelo | A (mm) | B (mm) | E (mm) | H1 (mm) | H2 (mm) |
|-----------------|----------------|--------------------------|-----------|-----------|-----------|------------|------------|
| GSF-F90M-131610 | 10 mm | UN 13/16"-16 | 85,0 | 49,2 | 41,0 | 24,0 | 22,0 |
| GSF-F90M-191612 | 12 mm | UN 1 3/16"-12 | 101,0 | 63,5 | 47,0 | 30,0 | 27,0 |
| GSF-F90M-1016 | 16 mm | UNS 1"-14 | 107,0 | 56,7 | 47,0 | 30,0 | 30,0 |
| GSF-F90M-191620 | 20 mm | UN 1 3/16"-12 | 128,0 | 77,0 | 58,0 | 36,0 | 32,0 |
| GSF-F90M-231625 | 25 mm | UN 1 7/16"-12 | 144,0 | 87,6 | 71,0 | 41,0 | 41,0 |
| GSF-F90M-271625 | 25 mm | UN 1 11/16"-12 | 153,6 | 97,2 | 78,0 | 50,0 | 41,0 |
| GSF-F90M-271632 | 32 mm | UN 1 11/16"-12 | 172,0 | 100,9 | 78,0 | 50,0 | 50,0 |


Poznámka: pro rozměry 10 až 32 mm je pracovní tlak 420 bar



Kolena 90° SAE s plochým čelem, dlouhé provedení, vnitřní závit s o-kroužkem, otočná

| Obj. č. | Hadice D DN | Závit SAE ploché čelo | A (mm) | B (mm) | E (mm) | H1 (mm) | H2 (mm) |
|-----------------|----------------|--------------------------|-----------|-----------|-----------|------------|------------|
| GSF-F90L-111610 | 10 mm | UN 11/16"-16 | 85,0 | 49,2 | 54,0 | 22,0 | 22,0 |
| GSF-F90L-131612 | 12 mm | UN 13/16"-16 | 86,0 | 48,5 | 83,0 | 24,0 | 27,0 |
| GSF-F90L-1016 | 16 mm | UNS 1"-14 | 112,9 | 62,6 | 70,0 | 30,0 | 30,0 |
| GSF-F90L-191620 | 20 mm | UN 1 3/16"-12 | 128,0 | 77,0 | 96,0 | 36,0 | 32,0 |
| GSF-F90L-231625 | 25 mm | UN 1 7/16"-12 | 144,0 | 87,6 | 114,0 | 41,0 | 41,0 |
| GSF-F90L-271632 | 32 mm | UN 1 11/16"-12 | 172,0 | 100,9 | 129,0 | 50,0 | 50,0 |

Poznámka: pro rozměry 10 až 32 mm je pracovní tlak 420 bar

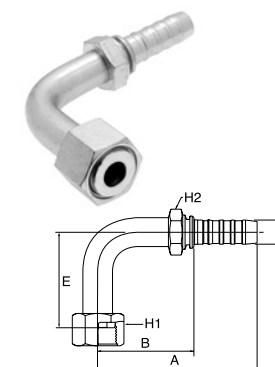

Koncovky SAE s plochým čelem, vnější závit s o-kroužkem

| Obj. č. | Hadice D DN | Závit SAE ploché čelo | A (mm) | B (mm) | H (mm) |
|--------------|----------------|--------------------------|-----------|-----------|-----------|
| GSF-M-111610 | 10 mm | UN 11/16"-16 | 64,0 | 28,2 | 19,0 |
| GSF-M-131612 | 12 mm | UN 13/16"-16 | 68,0 | 30,5 | 22,0 |
| GSF-M-191620 | 20 mm | UN 1 3/16"-12 | 89,0 | 38,0 | 32,0 |
| GSF-M-231620 | 20 mm | UN 1 7/16"-12 | 95,0 | 44,0 | 41,0 |
| GSF-M-231625 | 25 mm | UN 1 7/16"-12 | 102,0 | 45,2 | 41,0 |
| GSF-M-271632 | 32 mm | UN 1 11/16"-12 | 120,0 | 48,9 | 46,0 |

Poznámka: pro rozměry 10 až 32 mm je pracovní tlak 420 bar

