


# Hydraulická šroubení

přímá šroubení

3

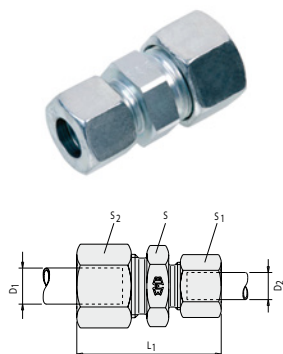

Redukovaná přímá šroubení – těžká řada										
Obj. č.		Řada	Tlak PN (bar)		Trubka D1	Trubka D2	Délka L1	SW S1	SW S2	SW S
ocel	nerez		ocel	nerez						
ER-68S	-	S	800	-	8 mm	6 mm	47	17	19	17
ER-610S	-	S	800	-	10 mm	6 mm	48	17	22	19
ER-810S	ERX-810S	S	800	630	10 mm	8 mm	48	19	22	19
ER-612S	-	S	630	-	12 mm	6 mm	50	17	24	22
ER-812S	ERX-812S	S	630	630	12 mm	8 mm	50	19	24	22
ER-1012S	-	S	630	-	12 mm	10 mm	51	22	24	22
ER-1014S	-	S	630	-	14 mm	10 mm	54	22	27	24
ER-1214S	-	S	630	-	14 mm	12 mm	54	24	27	24
ER-1216S	ERX-1216S	S	630	630	16 mm	12 mm	54	24	30	27
ER-1416S	-	S	630	-	16 mm	14 mm	57	27	30	27
ER-1020S	-	S	400	-	20 mm	10 mm	60	22	36	32
ER-1220S	ERX-1220S	S	400	630	20 mm	12 mm	60	24	36	32
ER-1620S	ERX-1620S	S	400	400	20 mm	16 mm	63	30	36	32
ER-1625S	-	S	400	-	25 mm	16 mm	68	30	46	41
ER-2025S	ERX-2025S	S	400	400	25 mm	20 mm	71	36	46	41
ER-2030S	-	S	400	-	30 mm	20 mm	74	36	50	46
ER-2530S	-	S	400	-	30 mm	25 mm	77	46	50	46
ER-3038S	-	S	400	-	38 mm	30 mm	87	50	60	55

**Upozornění:** pro objednání těla šroubení bez matice a řezného kroužku uveďte na začátek obj.č. písmeno X, např. XER-68S

Přepážková přímá šroubení										
Obj. č.		Řada	Tlak PN (bar)		Trubka D1	Závit M	Délka L1	Délka L3	SW S1	SW S
ocel	nerez		ocel	nerez						
K-6L	KX-6L	L	500	315	6 mm	M12 × 1,5	22	42	14	17
K-8L	KX-8L	L	500	315	8 mm	M14 × 1,5	23	42	17	19
K-10L	KX-10L	L	500	315	10 mm	M16 × 1,5	25	43	19	22
K-12L	KX-12L	L	400	315	12 mm	M18 × 1,5	25	44	22	24
K-15L	KX-15L	L	400	315	15 mm	M22 × 1,5	27	46	27	27
K-18L	KX-18L	L	400	315	18 mm	M26 × 1,5	30	49	32	32
K-22L	KX-22L	L	250	160	22 mm	M30 × 2	33	51	36	36
K-28L	KX-28L	L	250	160	28 mm	M36 × 2	35	52	41	41
K-35L	KX-35L	L	250	160	35 mm	M45 × 2	40	58	50	50
K-42L	KX-42L	L	250	160	42 mm	M52 × 2	42	59	60	60
K-6S	KX-6S	S	800	630	6 mm	M14 × 1,5	27	44	17	19
K-8S	KX-8S	S	800	630	8 mm	M16 × 1,5	28	44	19	22
K-10S	KX-10S	S	800	630	10 mm	M18 × 1,5	31	46	22	24
K-12S	KX-12S	S	630	630	12 mm	M20 × 1,5	31	47	24	27
K-14S	KX-14S	S	630	630	14 mm	M22 × 1,5	35	50	27	30
K-16S	KX-16S	S	630	400	16 mm	M24 × 1,5	35	50	30	32
K-20S	KX-20S	S	400	400	20 mm	M30 × 2	39	55	36	41
K-25S	KX-25S	S	400	400	25 mm	M36 × 2	44	59	46	46
K-30S	KX-30S	S	400	400	30 mm	M42 × 2	48	64	50	50
K-38S	KX-38S	S	400	315	38 mm	M52 × 2	53	68	60	65

**Upozornění:** pro objednání těla šroubení s kontramatkami, bez matice a řezného kroužku uveďte na začátek obj.č. písmeno X, např. XK-6L

související zboží:

Hadice  
str. 342



Rychlospojky  
str. 407



Nástrčné spojky  
str. 38



Manometry  
str. 625

