


Hydraulická šroubení

t-šroubení


T-šroubení se spodním vnitřním metrickým závitem, nastavitelná										
Obj. č.		Řada	Tlak PN (bar)		Závít d1	Trubka D	Délka L2	Výška L5	SW S1	SW S2
ocel	nerez		ocel	nerez						
VC-6L	V CX-6L	L	500	315	M12 × 1,5	6 mm	27	26	14	12
VC-8L	V CX-8L	L	500	315	M14 × 1,5	8 mm	29	27,5	17	12
VC-10L	V CX-10L	L	500	315	M16 × 1,5	10 mm	30	29	19	14
VC-12L	V CX-12L	L	400	315	M18 × 1,5	12 mm	32	29,5	22	17
VC-15L	V CX-15L	L	400	315	M22 × 1,5	15 mm	36	32,5	27	19
VC-18L	V CX-18L	L	400	315	M26 × 1,5	18 mm	40	35,5	32	24
VC-22L	V CX-22L	L	250	160	M30 × 2	22 mm	44	38,5	36	27
VC-28L	V CX-28L	L	250	160	M36 × 2	28 mm	47	41,5	41	36
VC-35L	V CX-35L	L	250	160	M45 × 2	35 mm	56	51	50	41
VC-42L	V CX-42L	L	250	160	M52 × 2	42 mm	63	56	60	50
VC-6S	V CX-6S	S	800	630	M14 × 1,5	6 mm	31	27	17	12
VC-8S	V CX-8S	S	800	630	M16 × 1,5	8 mm	32	27,5	19	14
VC-10S	V CX-10S	S	800	630	M18 × 1,5	10 mm	34	30	22	17
VC-12S	V CX-12S	S	630	630	M20 × 1,5	12 mm	38	31	24	17

Upozornění: pro objednání těla šroubení bez matice a řezného kroužku uveďte na začátek obj.č. písmeno X, např. XVC-6L

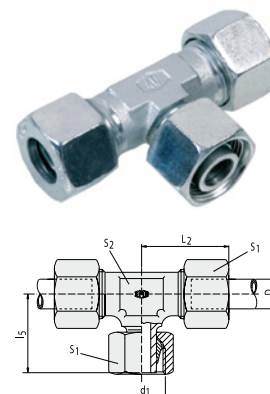

T-šroubení se spodním vnitřním metrickým závitem, nastavitelná, s kuželem a o-kroužkem dle DIN 3865										
Obj. č.		Řada	Tlak PN (bar)		Závít	Trubka D	Délka L	Výška L2	SW S3	SW S1
ocel	nerez		ocel	nerez						
VCK-6L	VCKX-6L	L	500	315	M12 × 1,5	6 mm	27	26	14	17
VCK-8L	VCKX-8L	L	500	315	M14 × 1,5	8 mm	29	27,5	17	17
VCK-10L	VCKX-10L	L	500	315	M16 × 1,5	10 mm	30	29	19	19
VCK-12L	VCKX-12L	L	400	315	M18 × 1,5	12 mm	32	29,5	22	22
VCK-15L	VCKX-15L	L	400	315	M22 × 1,5	15 mm	36	32,5	27	27
VCK-18L	VCKX-18L	L	400	315	M26 × 1,5	18 mm	40	35,5	32	32
VCK-22L	VCKX-22L	L	250	160	M30 × 2	22 mm	44	38,5	36	36
VCK-28L	VCKX-28L	L	250	160	M36 × 2	28 mm	47	41,5	41	46
VCK-35L	VCKX-35L	L	250	160	M45 × 2	35 mm	56	51	50	50
VCK-42L	-	L	250	-	M52 × 2	42 mm	63	56	60	60
VCK-6S	VCKX-6S	S	800	630	M14 × 1,5	6 mm	31	27	17	17
VCK-8S	VCKX-8S	S	800	630	M16 × 1,5	8 mm	32	27,5	19	19
VCK-10S	VCKX-10S	S	800	630	M18 × 1,5	10 mm	34	30	22	22
VCK-12S	VCKX-12S	S	630	630	M20 × 1,5	12 mm	38	31	24	24
VCK-14S	VCKX-14S	S	630	630	M22 × 1,5	14 mm	40	35	27	27
VCK-16S	VCKX-16S	S	630	400	M24 × 1,5	16 mm	43	36,5	30	30
VCK-20S	VCKX-20S	S	400	400	M30 × 2	20 mm	48	44,5	36	36
VCK-25S	VCKX-25S	S	400	400	M36 × 2	25 mm	54	50	46	46
VCK-30S	VCKX-30S	S	400	400	M42 × 2	30 mm	62	55	50	50
VCK-38S	VCKX-38S	S	400	315	M52 × 2	38 mm	72	63	60	60

Upozornění: pro objednání těla šroubení bez matice a řezného kroužku uveďte na začátek obj.č. písmeno X, např. XVCK-6L

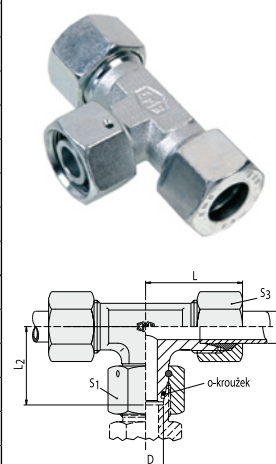

související zboží:

Trubky
str. 410



Těsnění závitů
str. 86



Hydraulické adaptéry
str. 388



Hadice
str. 479

