



Potrubi systém SICOAIR


pro stlačený vzduch, pro světlosti DN 20 až DN 65

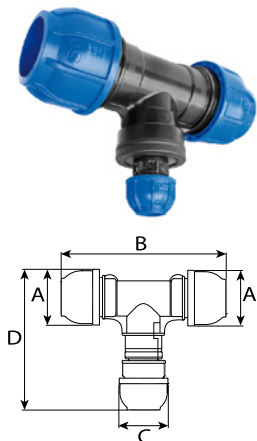


Redukované t-spojky SR247, s antikondenzační odbočkou							
Obj. č.	Velikost	Rozměry (mm)				Hmotnost (g)	Balení (ks)
		A	B	C	D		
SR247-402040	40 × 20 × 40 mm	72	182	44	150	380	1
SR247-402540	40 × 25 × 40 mm	72	182	52	161	398	1
SR247-502050	50 × 20 × 50 mm	86	225	44	168	654	1
SR247-502550	50 × 25 × 50 mm	86	225	52	179	673	1
SR247-503250	50 × 32 × 50 mm	86	225	62	187	700	1
SR247-504050	50 × 40 × 50 mm	86	225	72	196	755	1
SR247-632063	63 × 20 × 63 mm	105	262	44	195	1027	1
SR247-632563	63 × 25 × 63 mm	105	262	52	206	1049	1
SR247-633263	63 × 32 × 63 mm	105	262	62	214	1061	1
SR247-634063	63 × 40 × 63 mm	105	262	72	223	1055	1
SR247-635063	63 × 50 × 63 mm	105	262	86	235	1044	1



T-spojky s vnitřním závitem SR215							
Obj. č.	Velikost	Rozměry (mm)				Hmotnost (g)	Balení (ks)
		A	B	C	D		
SR215-1225	25 × 1/2" × 25 mm	52	132	30	75	118	5
SR215-3432	32 × 3/4" × 32 mm	62	159	37	85	193	5
SR215-1040	40 × 1" × 40 mm	72	182	43	103	300	1
SR215-1550	50 × 1 1/2" × 50 mm	86	225	62	121	550	1
SR215-2063	63 × 2" × 63 mm	105	262	77	148	874	1



Záslepky SR221					
Obj. č.	Velikost	Rozměry (mm)		Hmotnost (g)	Balení (ks)
		A	B		
SR221-20	20 mm	44	44	31	5
SR221-25	25 mm	52	53	54	5
SR221-32	32 mm	62	63	89	5
SR221-40	40 mm	72	68	120	1
SR221-50	50 mm	86	82	220	1
SR221-63	63 mm	105	94	347	1



Koncové spojky s vypouštěcím ventilem SR248						
Obj. č.	Velikost	Rozměry (mm)			Hmotnost (g)	Balení (ks)
		A	B	C		
SR248-20	20 mm	44	44	64	51	5
SR248-25	25 mm	52	53	88	104	5
SR248-32	32 mm	62	63	98	139	5
SR248-40	40 mm	72	68	103	170	1
SR248-50	50 mm	86	82	117	270	1
SR248-63	63 mm	105	94	129	397	1