

FILTER ELEMENT – BF-P

Series: BF Series
(Pre-Filter – Particulate)



DESCRIPTION

P grade filter elements have been specifically developed for efficient removal of coarse solid particles and bulk liquids from compressed air⁽¹⁾. This type of filter is generally used as pre-filter for coalescing filter.

⁽¹⁾For any other technical gas please contact us or your local dealer

FILTER ELEMENT RATING ACCORDING TO ISO 8573-1


Solid particles class	Water class	Oil class
6	/	/

Validated according to ISO12500-3

TECHNICAL SPECIFICATION

Operating temperature	1,5 - 65 °C / 35 - 149 °F
Operating pressure	0 - 16 barg / 0 - 232 psi
Differential pressure (dry)	10 mbar / 0,145 psi
Differential pressure (wet)	20 mbar / 0,290 psi
Particle retention (nominal)	99,99% (3 µm)
Particle retention rate ISO ⁽³⁾	95 %
Residual oil content ⁽⁴⁾	/
Flow Direction	INSIDE to OUTSIDE
Capacity (ISO12500-2) ⁽⁵⁾	/

⁽³⁾Tested according to ISO12500-3, 1bar(a), nominal flow, 06050 P, Most penetrating particle size MPPS 5 µm

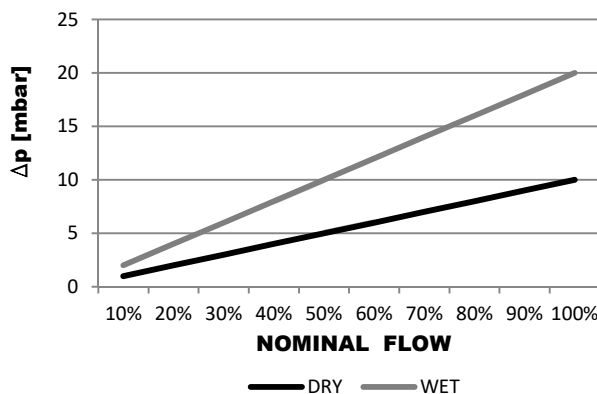

MATERIALS

Filter media	Acrylic fibers, cellulose
Protection media	Polyester fleece
Drainage media	/
Adsorption media	/
Support (inner-outer)	Stainless steel 1.4301
Bonding	Polyurethane
Endcaps	Aluminium
Sealing	NBR

SIZES

Model	Diameter [mm]	Height [mm]	Flow Capacity [Nm ³ /h]	Flow Capacity [scfm]	Fits into filter housing
1 x 76090 P	90	760	1680	989	BF 0240
2 x 76090 P	90	760	3150	1853	BF 0300
3 x 76090 P	90	760	4700	2765	BF 0450
4 x 76090 P	90	760	6300	3706	BF 0600
6 x 76090 P	90	760	9400	5530	BF 0900
8 x 76090 P	90	760	12550	7382	BF 1200
10 x 76090 P	90	760	15700	9235	BF 1500
12 x 76090 P	90	760	18850	11088	BF 1800
16 x 76090 P	90	760	25100	14765	BF 2500
20 x 76090 P	90	760	31400	18481	BF 3000

CORRECTION FACTORS

To calculate the correct capacity of a given filter based on actual operating conditions, multiply the nominal flow capacity by the appropriate correction factor(s). CORRECTED CAPACITY = NOMINAL FLOW CAPACITY x C_{OP}


OPERATING PRESSURE

[bar]	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
[psi]	29	44	58	72	87	100	115	130	145	160	174	189	203	218	232
C _{OP}	0,38	0,5	0,63	0,75	0,88	1	1,13	1,25	1,38	1,50	1,63	1,75	1,88	2,00	2,13

MAINTENANCE

Replace filter element at least once per year or when pressure drop reaches 350mbar.

INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE

	<p>Our quality management system is certified by BUREAU VERITAS in conformity with ISO 9001:2015</p>	
---	--	--