

SF SERIES

STAINLESS STEEL STERILE FILTERS

operating pressure	10 (16) bar
volume flow rate	75 to 21.120 Nm³/h
connections	DN10 to DN200
operating temp. range	-20 to +150°C
material	stainless steel 1.4301



APPLICATIONS

- packing industry
- biotechnology
- breweries
- chemical industry
- dairies
- fermentation processes
- food and beverage industry
- pharmaceutical industry
- hospitals

ADVANTAGES

- ✓ High-efficient sterile filtration of compressed air, process air and technical gasses
- ✓ High-efficient removal of sub-micron particles down to 0,01µm including microorganisms (bacteria)
- ✓ housing material on request 1.4404
- ✓ Polished surface of filter housing down to grade Ra0,8
- ✓ Filter element with exceptional strength assuring high-efficient filtration and allowing large number of sterilization cycles
- ✓ 100% integrity tested (DOP test)
- ✓ All components meet the FDA requirements for contact with food in accordance with the Code of Federal Regulations (CFR), title 21

DESCRIPTION

SF stainless steel sterile filter housings have been specifically developed for removing of impurities from compressed air⁽¹⁾ system. To meet the required compressed air quality appropriate filter element must be installed into filter housing. SF filter housing is also designed for sterilisation.

SF process filter housing can be used in variety of applications. For applications not listed above please contact producer or your local distributor.


⁽¹⁾ For any other technical gas please contact producer or your local distributor.



TECHNICAL DATA - SF FILTERS

SF FILTER ELEMENTS

Filter housing size	Pipe size	Max. oper. pressure bar/psi	Flow rate at 7 bar(g), 20°C		Dimensions [mm]					Mass kg	VSF sterile 0,01 µm
	inch		Nm ³ /h	scfm	A	B	C	D	E		
SF 006	DN10 / ø17,2	16/232	75	44	218	125	76,1	69	1/8"	1,6	1 x 0310-VSF
SF 009	DN10 / ø17,2	16/232	105	62	246	125	76,1	69	1/8"	1,7	1 x 0410-VSF
SF012	DN15 / ø21,3	16/232	150	88	251	120	76,1	69	1/8"	1,7	1 x 0420-VSF
SF 018	DN15 / ø21,3	16/232	225	132	275	120	76,1	69	1/8"	1,8	1 x 0520-VSF
SF 032	DN25 / ø35,7	16/232	315	185	303	169	114,3	86	1/4"	3,1	1 x 0530-VSF
SF 048	DN32 / ø42,4	16/232	600	353	363	169	114,3	86	1/4"	3,4	1 x 0730-VSF
SF 072	DN40 / ø48,3	16/232	900	530	446	169	114,3	86	1/4"	3,6	1 x 1030-VSF
SF 108	DN50 / ø60,3	16/232	1.260	742	587	183	114,3	96	1/4"	4,9	1 x 1530-VSF
SF 144	DN65 / ø76,1	16/232	1.680	989	763	195	139,7	120	1/4"	8,4	1 x 2030-VSF
SF 192	DN80 / ø88,9	16/232	2.400	1.413	1015	195	139,7	120	1/4"	10,2	1 x 3030-VSF
SF 432	DN100	10/145	5.040	2.966	1012	410	219,1	183	1/2"	44	3 x 2030-VSF
SF 576	DN100	10/145	6.720	3.955	1266	410	219,1	183	1/2"	45	3 x 3030-VSF
SF 768	DN150	10/145	9.600	5.650	1305	480	273	225	1/2"	70	4 x 3030-VSF
SF 1152	DN150	10/145	13.440	7.910	1418	540	323,9	256	1"	80	6 x 3030-VSF
SF 1536	DN200	10/145	17.200	10.124	1568	660	406,4	306	1"	135	8 x 3030-VSF
SF 1920	DN200	10/145	21.120	12.431	1568	660	406,4	306	1"	135	10 x 3030-VSF

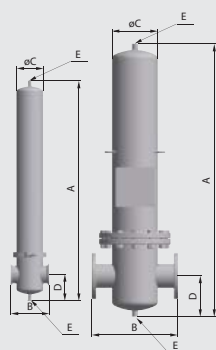

quality class - solids (ISO 8573-1)	1
quality class - oils (ISO 8573-1)	-
pressure drop - new element (dry) [mbar / psi]	80/1,160
pressure drop - new element (wet) [mbar / psi]	190/2,756
filter media	Borosilicate micro fibres
pleated version	-
wrapped version	✓
sintered version	-
min. operating temperature (°C / °F)	-20 / -4
max. operating temperature (°C / °F)	150 / 302

CORRECTION FACTORS

Operating pressure [bar]	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Operating pressure [psi]	29	44	58	72	87	100	115	130	145	160	174	189	203	218	232
Correction factor	0,38	0,50	0,63	0,75	0,88	1	1,13	1,25	1,38	1,50	1,63	1,75	1,88	2,00	2,13