


# Hydraulická šroubení

## t-šroubení

3

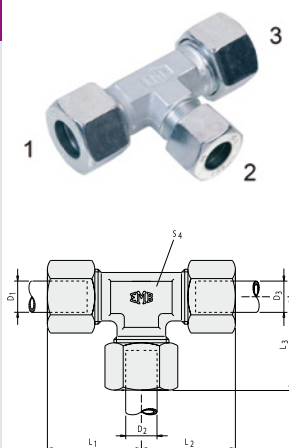

T-šroubení										
Obj. č.		Řada	Tlak PN (bar)	Trubka			Délka L1	Délka L2	Výška L3	SW S4
ocel	nerez			D1	D2	D3				
GR-10610L	-	L	500	10 mm	6 mm	10 mm	30	30	30	14
GR-10810L	-	L	500	10 mm	8 mm	10 mm	30	30	30	14
GR-12612L	-	L	400	12 mm	6 mm	12 mm	32	32	32	17
GR-1288L	-	L	400	12 mm	8 mm	8 mm	32	32	32	17
GR-12812L	-	L	400	12 mm	8 mm	12 mm	32	32	32	17
GR-121012L	-	L	400	12 mm	10 mm	12 mm	32	32	32	17
GR-121512L	-	L	400	12 mm	15 mm	12 mm	36	36	36	19
GR-151015L	-	L	400	15 mm	10 mm	15 mm	36	36	36	19
GR-151215L	-	L	400	15 mm	12 mm	15 mm	36	36	36	19
GR-181018L	-	L	400	18 mm	10 mm	18 mm	40	40	39	24
GR-181218L	-	L	400	18 mm	12 mm	18 mm	40	40	39	24
GR-181518L	-	L	400	18 mm	15 mm	18 mm	40	40	39	24
GR-221022L	-	L	250	22 mm	10 mm	22 mm	44	44	43	27
GR-221222L	-	L	250	22 mm	12 mm	22 mm	44	44	43	27
GR-221522L	-	L	250	22 mm	15 mm	22 mm	44	44	43	27
GR-221818L	-	L	250	22 mm	18 mm	18 mm	44	44	44	27
GR-221822L	-	L	250	22 mm	18 mm	22 mm	44	44	44	27
GR-281028L	-	L	250	28 mm	10 mm	28 mm	47	47	46	36
GR-281528L	-	L	250	28 mm	15 mm	28 mm	47	47	46	36
GR-282222L	-	L	250	28 mm	22 mm	22 mm	47	47	47	36
GR-282228L	-	L	250	28 mm	22 mm	28 mm	47	47	47	36
GR-12812S	-	S	630	12 mm	8 mm	12 mm	38	38	37	17
GR-121612S	-	S	630	12 mm	16 mm	12 mm	42	42	43	24
GR-16816S	-	S	630	16 mm	8 mm	16 mm	43	43	41	24
GR-161216S	-	S	630	16 mm	12 mm	16 mm	43	43	42	24
GR-162016S	-	S	400	16 mm	20 mm	16 mm	47	47	48	27
GR-201020S	-	S	400	20 mm	10 mm	20 mm	48	48	46	27
GR-201220S	-	S	400	20 mm	12 mm	20 mm	48	48	46	27
GR-201620S	-	S	400	20 mm	16 mm	20 mm	48	48	47	27
GR-202520S	-	S	400	20 mm	25 mm	20 mm	53	53	54	36
GR-251625S	-	S	400	25 mm	16 mm	25 mm	54	54	52	36
GR-252025S	-	S	400	25 mm	20 mm	25 mm	54	54	53	36

**Upozornění:** pro objednání těla šroubení bez matice a rezného kroužku uveďte na začátek obj.č. písmeno X, např. XGR-686L

související zboží:

Hadice  
str. 342



Rychlospojky  
str. 407



Nástrčné spojky  
str. 38



Manometry  
str. 625

